

HOSHIZAKI



Code:

071T.1111AH.EB

Touch Screen Hood Type Dishwasher

Model:

HW-600B PDRT



MAIN FEATURES

- * Userfriendly touch screen panel
- * Easy to follow washing steps with dynamic and coloured screen
- * Stainless steel body including washing and boiler tank.
- * Monoblock hygenic washing tank.
- * 69/35/27/23/18 racks per hour (Rack dimensions 50X50 cm)
- * 2.3 lt water consumption per cycle
- * On-screen easy-to-failure status monitoring
- * Digital Pressure switch for washing tank
- * Adjustable detergent / Rinse aid time from screen panel
- * Non-returned - check valve system
- * Saves energy, detergent and water
- * Easy start-up: Single button for water filling and heating in the boiler tank.
- * Adjustable feet for height optimization
- * The dishwasher is completely sealed to guarantee IPX5 water protection
- * Electrical components and cabling according to international standards and safety regulations
- * Washing and rinsing temperatures thermo-stop controlled.
- * Contais stainless steel tank filter
- * Touch screen for temperatures and error displays.
- * Washing temperature at 55-60°C (water supply at a minimum of 2 bar and 50°C)
- * Rinsing temperature at 80-85°C (water supply at a minimum of 2 bar and 50°C)

OPTIONS

ACCESSORIES


- * Electrical Connection Cable, Flexible Water Supply and Drain Hose
- * 3 Baskets Promotional (Plate,Glass, and Cutlery)
- * Detergent Dispenser
- * Rinse Aid Dispenser
- * Drain Pump
- * Rinsing Pump

STANDARDS

- * EN 60335-1 European Standard relating to safety of household and similar electrical appliances
- * EN 60335-2-58 European Standard relating to the safety of electric appliances



Code:	Touch Screen Hood Type Dishwasher	Model:
071T.1111AH.EB		HW-600B PDRT

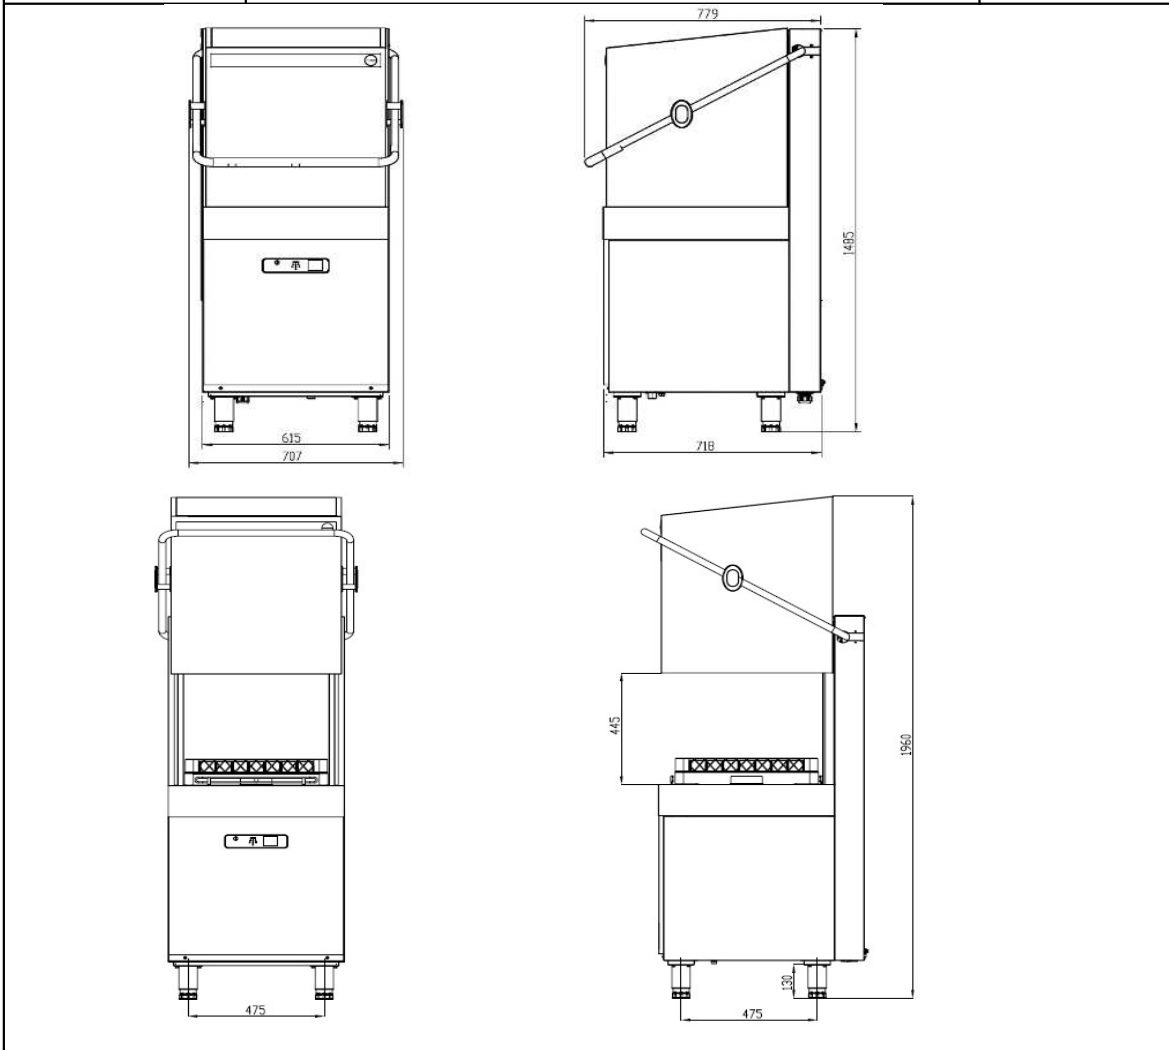

DIMENSIONS (Net)		DIMENSIONS (Shipping)	
* Width (mm):	707	* Width (mm):	725
* Depth (mm):	779	* Depth (mm):	795
* Height (mm):	1485 (1960)	* Height (mm):	1638
* Weight (kg):	110 (+/- 10)	* Weight (kg):	120
		* Volume (m³):	0,94

TECHNICAL SPECIFICATIONS			
* Washing Capacity (Basket/hr):	69/35/27/23/18	* Electric consumption:	3,41 Kw 220 V 60 Hz
* Washing Tank Capacity:	22 lt		3,96 Kw 240 V 60 Hz
* Boiler Tank Capacity:	7 lt	WATER-IN	
* Washing Pump Power:	0,66 kW	* Cold water inlet:	3/4 inch
* Rinsing Pump Power:	0,25 kW	* Hot Water Inlet:	3/4 inch
* Washing Heat power:	1,8 kW (220 V) 2,2 kW (240 V)	* Water inlet pressure	2-4 Bar
* Rinsing Heat power:	2,75 kW (220 V) 3,3 kW (240 V)	DRAIN	
* Max. Noise:	67 dBA	* Dirty water discharge connection:	3/4 inch (Ø28 mm)
* Loading Height:	445 mm	Protection class:	IPX5